


Digital input interface with 8 inputs
TDS12118


Interface to be connected to the AUTOBUS. This interface has 8 voltage free contact inputs. These are to be used to connect for example standard push buttons (any brand), window contacts, etc...

The interface is to be plugged on a DIN-rail.

Application:		AUTOBUS input interface for up to 8 voltage free contacts.
Characteristics:	Inputs:	8 voltage free contacts (low frequency max. 1Hz)
Settings:	Functions:	Through PROSOFT
	AUTOBUS address:	Trough rotary switches ROT1 + ROT2: MICROS: from 6 to 25 COMPACT: from 01 to 40 PROJECT: from 01 to 99
	Jumpers:	JP1+JP2: baudrate (standard 9600) JP3: terminating resistor (stand. off)
Installation:		DIN-rail mounting
Connections:	AUTOBUS:	By enclosed AUTOBUS connector
Dimensions:	Dimensions	Width: 102; height: 78; diepth: 45 (in mm) about 5,5 modules
	Weight	0,190 kg
Schematic Drawing:		

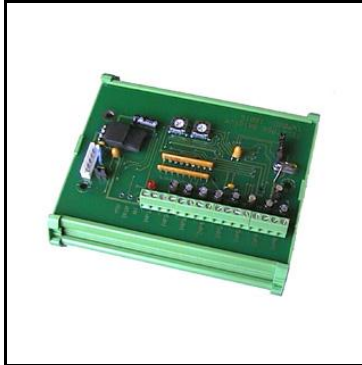