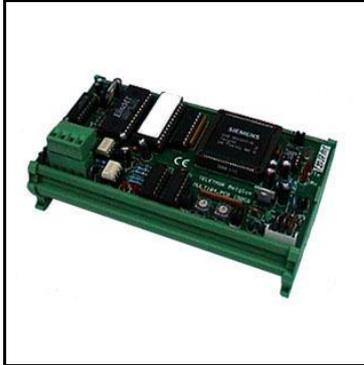


AUDIOACCESS audio interface; multi system
TDS14016


Interface to 2 to 6 audio AUDIOACCESS PX600 multiroom – multi source systems.

Application:

To control multiple AUDIOACCESS PX600 systems via AUTOBUS.

Characteristics:

Interface between AUTOBUS and PX600 BUS.
Command of 2 to 6 Audioaccess systems.

Settings:

Functions: through PROSOFT

AUTOBUS address: through rotary switches ROT1 + ROT2:

MICROS: from 6 to 25

COMPACT: from 01 to 40

PROJECT: from 01 to 99

AUTOBUS Baud rate: J2 and J3 (9600)

Installation:

DIN rail mounting

Connections:

AUTOBUS: by enclosed AUTOBUS connector.

PX600 :BUS: By screw terminals to the PX600 bus cable.

Dimensions:

Width:131; height: 78; depth: 48 (in mm)
About 7,5 modules

Power Consumption

Minimum 90 mA

Medium 90 mA

Maximum 90 mA

Schematic Drawing:

