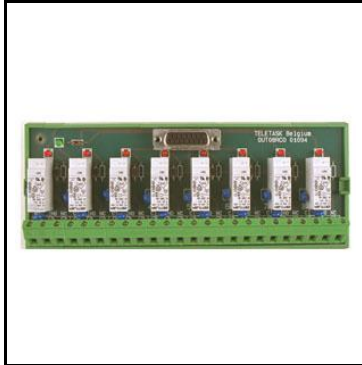


Relay output module with 8 change over contacts
TDS13110


Relay module with 8 voltage free, change over, contacts. The module is to be connected to the TDS central unit by means of a dedicated cable (ref. TDS90101, TDS90103, TDS0105 or TDS90110). Each relay has its own led-indicator (when led active, the relay is active, the normal open contact is closed and the normal closed contact is open).

Not for new designs

Application:

External relay output module; to be used as direction relay in motor control circuits for shutters, curtains, drapes, etc... (in combination with the TDS13120 SSR relay module)

Characteristics:

8 x relay with 8 CO contacts.
 Switching power per relay output:
 $I_N = 2A/230V$
 $I_{HI} = 8A$ (see Remark: Inrush Currents)
 Indication per LED

Settings:

None

Installation:

DIN-rail mounting

Connections:

Central unit:	By cable TDS9010x to the evolved central unit. (optional)
Contacts:	Screw terminals, max. wire 2,5mm ² .

Dimensions:

Dimensions	Width: 192; height: 78; depth: 44 (in mm) About 10 modules
Weight	0,380 kg

Schematic Drawing

