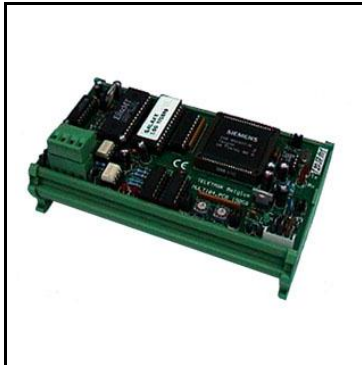


BOSE Audio interface
TDS14035


The TELETASK- BOSE interface is to be connected to the BOSE Lifestyle 40 - 50 systems. The interface can control up to four audio zones, which are connected to the BOSE system.

Application:

To control a Bose lifestyle 40/50 multi-room/multi-source audio system via the TELETASK inputs. At the other hand you can control TELETASK functions on the BOSE personal music centre remote control.

Characteristics:

Interface between the AUTOBUS and the BOSE serial port.
 Maximum 4 audio zones can be controlled.
 8 TELETASK functions can be controlled by the BOSE 'personal music centre' remote control. In the other way, the BOSE system can be controlled by the TELETASK remote control.

Settings:

Functions:	through PROSOFT
AUTOBUS address:	through rotary switches ROT1 + ROT2:
	MICROS: from 6 to 25
	COMPACT: from 01 to 40
	PROJECT: from 01 to 99
AUTOBUS Baud rate:	J2 and J3 (9600)

Installation:

DIN rail mounting

Connections:

AUTOBUS:	by enclosed AUTOBUS connector.
Bose:	Cable (1m) with plug-in connector is included

Dimensions:

152 W x 90 H x 50 D (in mm)
 About 8,5 modules

Power Consumption

Minimum
 Medium
 Maximum

Schematic Drawing:

